



PeopleLink Interactive Display R Series 55 inch





Redefine Smarter Collaboration with PeopleLink Interactive Display R55SC

Let the versatile 4K UHD interactive display bring more collaboration and student engagement to your classroom. With your fingers and the press of a button, you can turn the display into a digital whiteboard, share files in one touch, and use your favorite software. PeopleLink R55SC Interactive display works in your world and lets you interact your way.

Key Features

- Zero bonding technology, low parallax writing and wider viewing angles
- 4mm anti-glare tempered glass lap
- 4K Ultra HD display, support full channel 4K UI display
- Front panel USB 3.0 x 2, with 6 buttons
- Support Screen Mirroring
- High precision IR touch makes the user write more smoothly
- Support dual pens with different color displays, which makes teamwork easier
- One network support, Android and OPS are 100 Gigabit networks
- Support for network sharing
- High level welcome application, enriching the live interactive experience with great fun
- Split whiteboard, parallel tasks and wider scenes
- New hover ball mode for quick customization of features
- Eye protection, lock screen, touch lock and other tools
- Support for multi-user functionality



• Superior Touch Experience

With PeopleLink R55SC state-the-art touch technology, Users can annotate with a writing stylus or fingers which is as natural as writing on papers.

• Interaction made easy.

PeopleLink R55SC Interactive display brings efficiency to your classes and teams so you can interact with ease, anytime. With a lightweight slim frame design, Windows system and built-in OS support, embedded tools and a personalized user interface, it's the perfect solution to seamless collaboration in school and in the office.

Interact with the whole group

PeopleLink R55SC Interactive display series supports up to 20 points of touch, allowing multiple users to interact at the same time. With smooth and responsive touch, anyone can take notes, write and draw on the screen, making the classroom a truly collaborative space.

Customize the interface to meet your needs

Whether you need a display for your classroom or conference room, the PeopleLink R55SC Interactive display lets you easily change the screen theme and personalize the user interface on your built-in operating system. Keep the home screen simple while giving your team quick access to any tools they might need.

General Specifications

Display Parameters

Size : 55" Visual ratio : 16:9 Max visual area : 1209.6(H) × 680.4 (V)mm Resolution : 3840 (H) × 2160 (V) Pixel pitch : 0.315 × 0.315mm Frequency : 60Hz Display colors : 1.07B (10bit) Color gamut (Typ) : 72% Contrast ratio (Typ) : 1200:1 Dynamic contrast ratio : 30,000:1 Viewing angle : 178°(H/V) Back light source : DLED Brightness : Upto 450 nits Life span : \geq 50000hrs

Speakers, Camera & Mic

Soundtrack : 2.0 Power : 2 x 20W Camera : 13MP Microphone : 8 array

Touch Specifications

Touch mode : Infrared identification Touch points : 20 points touch Minimum identifier : 2mm Input mode / Writing display : Opaque object (finger, pen, etc.) Response time : ≤5ms Touch accuracy : ±1mm Writing height : ≤3mm Output coordinates : 32767 (W) × 32767(D) Surface hardness : 9 Mohs



General Specifications

System

System version : Android 12.0 Working frequency : 1.2GHZ CPU : 8core A55 GPU : Quad-core MaliG52 RAM : 8GB ROM : 128GB OSD : English (Supports all major Indian languages)

Bluetooth

Bluetooth version : 5.0 Operation frequency : 2.4GHz Operation distance : 0~10m Remark : Built-in Bluetooth

Wi-Fi

Version : I802.11ac/b/g/n/a Operation frequency : 2.4GHz/5GHz Operation distance : 0~10m Remark ; Built - in Wi-Fi mode

Power Parameters

Voltage : $220V \sim 50Hz \ 1.5A$ Max power consumption : 330WStandby power consumption : 0.5W

Size and Weight

Bare dimension : $1263 \times 793.63 \times 87.6$ mm Packing dimension : $1390 \times 210 \times 910$ mm Machine + wall mount thickness : 117.6mm VESA hole site : 400×200 mm Wall mounting screw specifications : M8 $\times 25$ mm Net weight ; 28 ± 1 KG Gross Weight : 33.15 ± 1 KG

Front Interface

USB 3.0 : 2

Keys : Power/Homepage/Screen down/Record/Touch lock/Setting

Onboard Interface

1 x TF Card supports (64GB, 128GB, 256GB Up to 1 TB), 1 x USB 3.0, 1 x USB 2.0, 1 x TOUCH Out, 2 x HDMI In, 1 x VGA, 1 x AUDIO In, 1 x RS232, 1 x RJ45 IN, 1 x Earphone, 1 x Coax

Optional Interfaces

1 x HDMI Out, 1 x DP In, 1 x RJ45 Out, 1 x Mic In,

OPS

CPU : Intel®Core[™] i5/i7, 8th/10th/12th Gen, Octa Core

Memory: 8GB/16GB DDR4

Storage: 256GB SSD/ 512 GB/ HDD 1TB (Optional)

Interfaces : 6 x USB3.0 Type-A, 1 x USB Type-C, 1 x RJ45 10/100/1000M , 1 x HDMI1.4 out, Max.4K/30Hz, 1x DP out, 1 x 3.5mm Line out, 1 x 3.5mm Mic in, 2 x WIFI ANT, 1 x Power button,

Accessories

1 x Power cord, 1 x Writing Pen, 1 x Wall mount, 1 x Operational Manual

Environmental factors

Working temperature : 0°C~40°C Working humidity : 10%~90%RH Storage temperature : -20°C~60°C Storage humidity : 10%~90%RH Working Elevation : <5000m

Optional modules


OPS module dimension OPS size (120mm x 180mm x 30mm) OPS size (195mm x 180mm x 30mm) OPS size (195mm x 180mm x 42mm)



Application Scenarios

Meeting room	Conference room	Classroom / Training room

Disclaimer:- Room setup diagrams provided for reference only. Actual room setup and size may vary as per requirements.

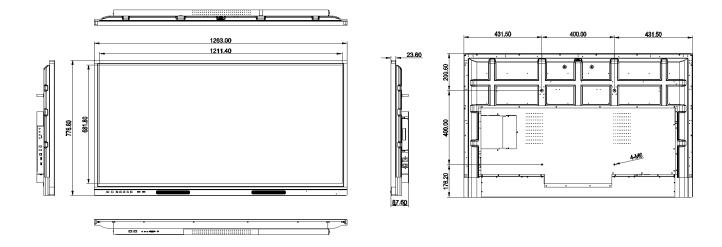

Ordering Information

R55SSC Standard (4+32GB) with Built-in Camera	:	PDS-ICB-RX10
R55SS Standard (4+32GB)	:	PDS-ICB-RX11
R55SH Standard (4+32GB) with HDMI-Out Port	:	PDS-ICB-RX12
R55E Expanded (8+128GB)	:	PDS-ICB-RX13
R55EH Expanded (8+128GB) with HDMI-Out Port	:	PDS-ICB-RX14

LEARN MORE

For more information on Interactive Display R55 inch Click Here

SALES AND INQUIRIES

Global Headquarters

Q3-A3, 10th Floor Cyber Towers, H ITEC City, Hyderabad, Telangana 500081, **India Phone:** +91 9100123013 **Email:** vc@peoplelinkvc.com

International Contact Numbers USA: +1 669-696-8383

Australia: +61 370 037070 France: +33 6 80 75 26 42 Middle East: +966 530019292 UK: +44 20 4571 5454 UAE: +971 4 3339082 Canada: +1 647-945-7373 Malaysia: +(6)018-2872188 New Zealand: +64-9-802-4666 Africa: +254 107 529 656

Tech Support

Toll Free: 1800 208 3399 customersupport@peoplelinkvc.com

© 2024 All rights reserved PeopleLink. the PeopleLink logo and other PeopleLink marks are owned by PeopleLink and may be registered.

Disclaimer: All other trademarks are the properties of their respective owners. PeopleLink assumes no responsibility for any errors that may appear in this publication. Product, pricing and feature information contained herein is subject to change without notice.