



V 1.1 - 102024

## PeopleLink e-Podium Delta Plus



Watch Video 

PeopleLink e-Podium Delta Plus delivers unmatched interaction with various digital devices. Its ergonomic design allows you to collaborate with your partners, customers, and business associates with technological ease. Its modular form factor provides great productivity benefits, enabling easy mobility of the device.

## Specifications

### BODY / FORM FACTOR

**Body and Top** : Metallic

**All doors Lockable** : Yes

**Top Sliding Mechanism** : Yes

**Provision for Monitor** : Yes

**Electronic Monitor Lift** : Yes

**Document Camera Tray** : Yes  
(Sliding Type)

**Door access** : Front/Rear

**Chassis** : Polymer coated CRCA steel sheet

**Thickness of enclosure** : 1.6mm

### CPU (Optional)

**Processor** : Intel i3 / i5 / i7

**RAM** : 4 GB / 8GB /16GB

**HDD** : 1TB or **SSD** : 512GB

**Operating System** : Windows 10

**Keyboard & Mouse** : Yes

## General Specifications

### Touch Monitor Features

**Screen Size** : 21.5" Diagonal

**Resolution** : 1920 x 1080

**PC Connection** : USB Port

**Brightness** : 250 cd/m<sup>2</sup>

**Input** : DVI, HDMI

**Touch** : Finger and Stylus with capacitive Touch

**Stylus Type** : Battery Free Pen

**Display Colors** : 16.7M

**Response Time** : 5ms

**Contrast Ratio** : 1000/1

**Operating System** : Windows, Linux, Mac

### Electrical

**Power** : 100 – 250V AC

### Contents

**Accessories** : 1.5 Meters HDMI Cable x1,  
3.5mm Male to Male x 1, USB 2.0 M to M x4.

### Laptop Interface

**Laptop Interface** : Inbuilt

**Video Port For laptop** : 1x HDMI(4K), 1x USB

**Audio Port For Laptop** : 1x 3.5mm Stereo Female Port

**Buttons**: Video Selection buttons x 4, Microphone Control Buttons, Volume Control Buttons, projector Control Buttons, Screen up/Down Buttons.

**LAN Port** : 1x RJ-45

**USB 2.0 Ports** : 4 x USB 2.0 Ports,  
1xUSB (Laptop Touch & DSP), 1xUSB ( CPU Touch & DSP)

**Power Socket** : 3 Pin AC 220 Power Socket

**Input / Output Ports** : 4x HDMI Inputs, 2x HDMI Outputs

### Gooseneck Microphone Features: (Optional)


**Cartridge** : 20mm Condenser

**Frequency Response** : 40~20000 Hz.




**Polar Pattern and Microphone Type** : Cardioids,  
Polarized Condenser

**Connectors** : 3-Pin XLR with 48V Phantom Power and 200 Ohms impedance.

**Sound Pressure Level (SPL)** : 138 DB SPL@ 1% Threshold

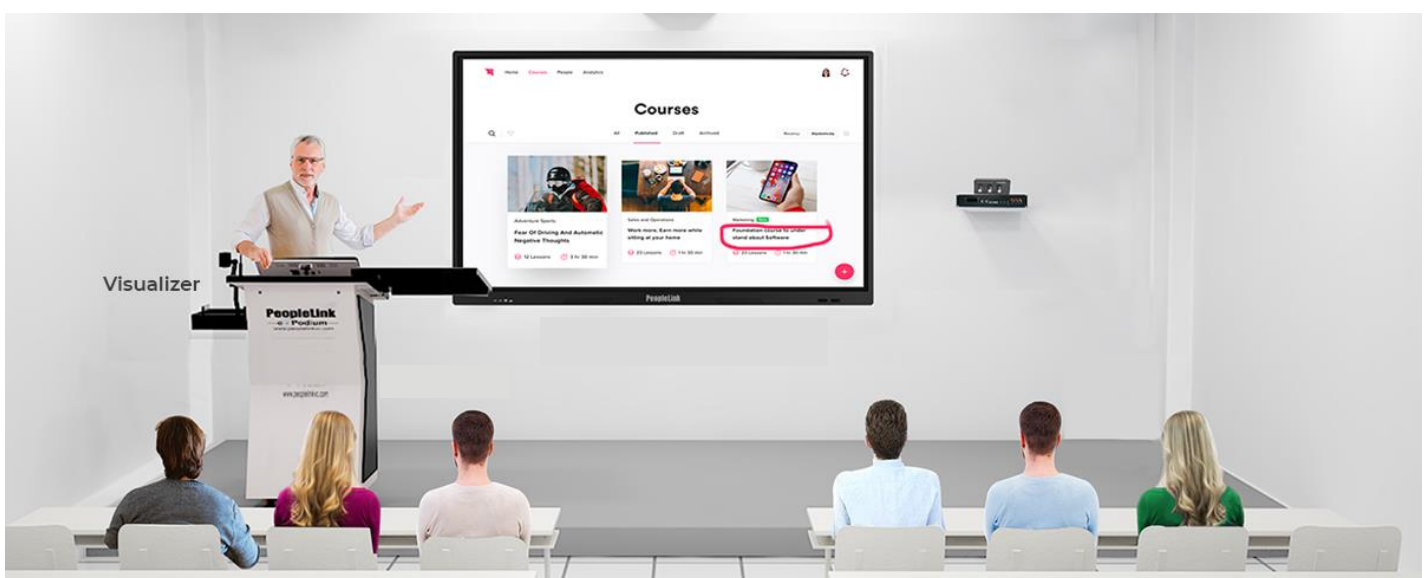

## Application Scenarios

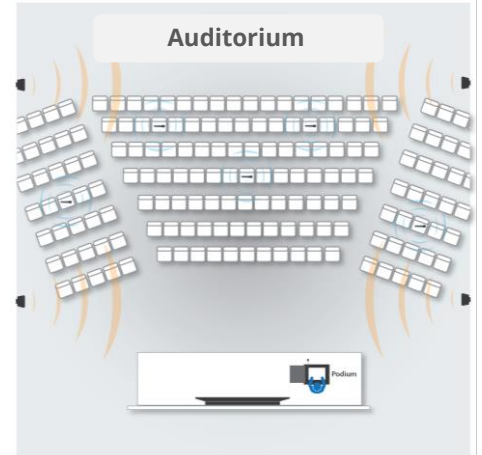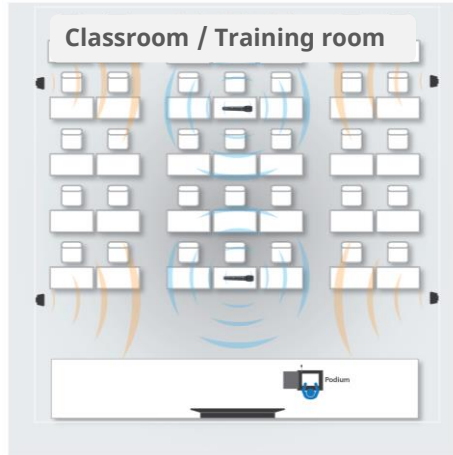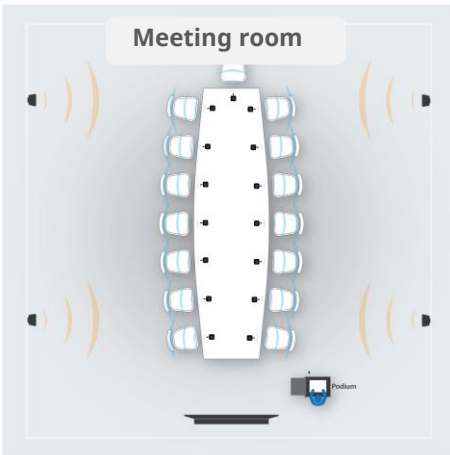

**Disclaimer:-** Room setup diagrams provided for reference only. Actual room setup and size may vary as per requirements.

## Ordering Information

**Part code**

: **PCU – PDP – EP - DELTA PLUS**

**LEARN MORE**

For more information on e-Podium [Click Here](#)

## SALES AND INQUIRIES

### Global Headquarters

Q3-A3, 10th Floor Cyber Towers,  
HITEC City, Hyderabad,  
Telangana 500081, **India**  
**Phone:** +91 9100123013  
**Email:** vc@peoplelinkvc.com

### International Contact Numbers

**USA:** +1 669-696-8383  
**Australia:** +61 370 037070  
**France:** +33 6 80 75 26 42  
**Middle East:** +966 5300 19292  
**UK:** +44 20 4571 5454

### Tech Support

**Toll Free:** 1800 208 3399  
customersupport@peoplelinkvc.com