



V 1.1 - 102024

PeopleLink Impact Pro 12X Endpoint



KEY FEATURES:

- Integrated Design
- 72.5° wide angle lens
- 1080p Full HD Video Support
- 12x optical zoom
- 16x digital zoom
- Built-in VPN
- Network address book
- Wi-Fi (Optional)

Full-High Definition video conferencing Achieve collaboration up to 1920 x 1080 60fps (1080p) even at lower Bandwidths. Unmatched Data Collaboration Suite Share high-quality, rich media across with the connected participants along with an exclusive data collaboration suite to make collaboration more interactive & productive. Ubiquitous Video collaboration Take your Collaboration out of the fixed office spaces. Connect with your teams on the fly from your mobile devices. High-Definition Collaboration Experience High-definition video collaboration with PeopleLink embedded multipoint endpoints, distinct team members can now connect visually with the ease of technology and optimized bandwidth. The Solution seamlessly transforms into a full-fledged Telepresence suite with additional modules. Seamless Interoperability Connect with ease to the existing standards-based video systems while securing the prior investments made. PeopleLink ensures a seamless integration with the other hardware-based endpoints to conduct conferencing & presentation sharing to ensure much more effective visual collaboration for your organization with necessary licenses.

Technical Specifications:

Package Includes

- 1 x HD Codec Built-in 12x Zoom HD PTZ Camera
- 1 x Omni-array Microphone
- 1 x Remote Control
- 1 x AC Power Adapter
- 1 x AC Power Cable
- 2 x HDMI cable (1.5m)
- 1 x User Manual

Bandwidth

64kbps ~ 8Mbps

Standards & Protocols

ITU-T H.323, IETF SIP

Video Features

- Native 4:3 & 16:9 aspect ratio
- Multiple Screen Layouts

Video Standards And Protocols

H.261, H.263, H.263+, H.264,
H.264HP ITU-T H.239, BFCP

Audio Standards And Protocols

G.711, G.722, G.722.1, G.722.1C, AAC-LD, G.723.1,
G.726, G.728, SILK

Video Input

- 1 x Built-in Camera
- 1 x DVI-I
- 2 x USB 2.0

Video Out

- 2 x HDMI

Audio Input

- 1 x 3.5mm line-in jack
- 1 x 3.5mm mic-in jack
- 1 x RJ45 digital mic-in jack

Audio Output

- 1 x 3.5mm line-out jack
- 1 x HDMI audio output

Video Resolution

- 1080p
- 720p
- 4SIF/4CIF
- SIF/CIF/QSIF/QCIF/SQSIF/SQCIF

Camera:

Video Output Pixels : 1080P

Sensor : 2.07M effective pixel, 1/2.7-inch CMOS

Zoom : 12x optical zoom, 16x digital zoom

Maximum horizontal angle : 72.5°

Panning/Tilting angle : 44.8° ~ 3.9°

Automatic White Balance (AWB), Automatic Exposure (AE),
Automatic Focus (AF)

Far-end camera control : support

A number of preset positions : 8

Audio

- Acoustic Echo Cancellation (AEC)
- Automatic Gain Control (AGC) ±6 dB
- Acoustic Noise Suppression (ANS) 12 dB
- Lip synchronization

Data Collaboration

Remote Desktop Sharing

Network Standards & Protocols

TCP/IP, DHCP, SSH, HTTP, HTTPS with SSL/TLS, RTP, RTCP,
RFC3261, RFC3264, RFC2190, RFC3407, RFC2833,
RFC4585(RTP/AVPF), SNTP, ARP

Network

- 1 x RJ45:** 10/100 Base-T
- 1 x Wireless :** 802.11a/b/g/n Wi-Fi (optional)

Security Features

H.235 (AES) signaling and media stream encryption •
Administrator password, SSH/HTTPS

Firewall Traversal

H.460.18, H.460.19, H.460.23, H.460.24 firewall traversal,
ICE

Other Protocols

H.221, H.225, H.235, H.241, H.245, H.281, H.350, H.460, T.140, DTMF

Other Features

1000 local address book

LDAP/Network address book, H.350

Specifications

Operating Temperature : 0°C to 40°C

Operating Humidity : 10% to 80%

Non-Operating Temperature : -40° to -70°C

Non-Operating Humidity (Non-condensing) : 0% to 95%

Peripheral Noise : < 46 dBA SPL

Lowest Luminance : 5 lux

Recommended Luminance : > 300 lux

Firewall Traversal

H.460.18, H.460.19, H.460.23, H.460.24 firewall traversal, ICE

Electrical

Working voltage : AC 100V ~ 240V, DC 12V

Working frequency : 50/60Hz

Power consumption : 24W

Physical Dimensions


Codec Dimensions : 258mm x 146mm x 170mm

Package Dimensions : 304mm x 248mm x 257mm


Net weight : 1.7 kg

Package Weight : 2.5 kg

Application Scenarios

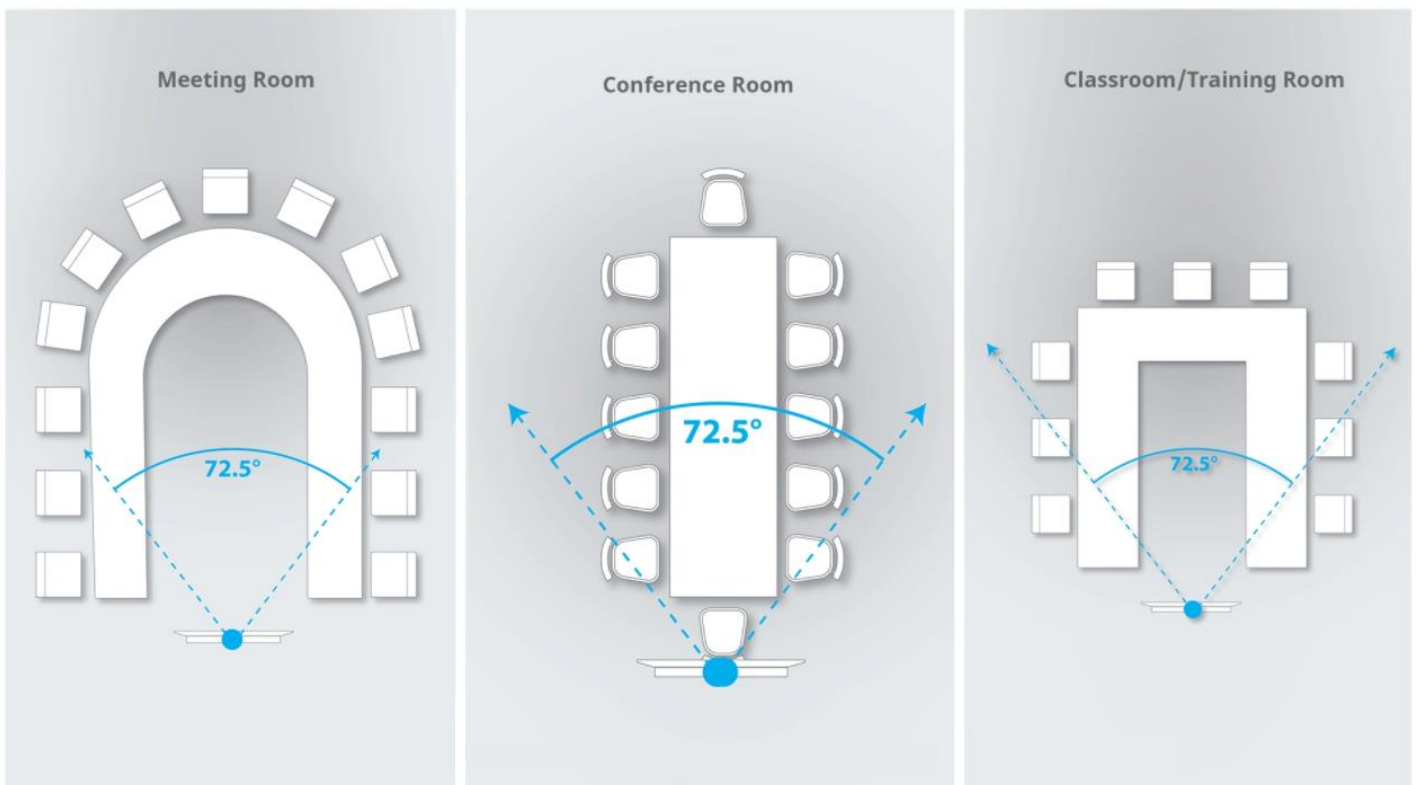

Disclaimer:- Room setup diagrams provided for reference only. Actual room setup and size may vary as per requirements.

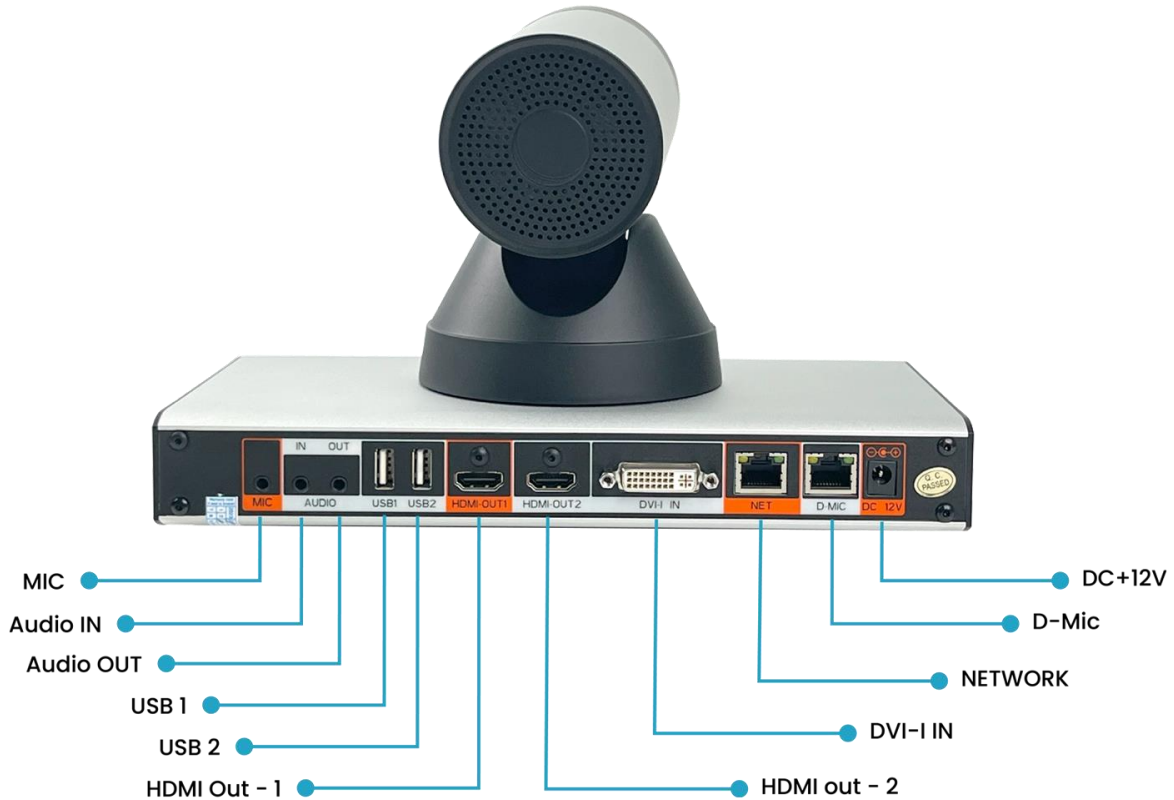

Warranty

Support Level: One-year Warranty with PeopleLink Direct Service Support. For additional / extended Warranty & Support, contact the PeopleLink Support Team.

Ordering Information:

PeopleLink Impact Endpoint

:

PEP - PIS - HXP

LEARN MORE

For more information on **PeopleLink Impact Pro 12X Endpoint** [Click Here](#)

SALES AND INQUIRIES

Global Headquarters

Q3-A3, 10th Floor Cyber Towers,
HITEC City, Hyderabad,
Telangana 500081, **India**
Phone: +91 9100123013
Email: vc@peoplelinkvc.com

International Contact Numbers

USA: +1 669-696-8383
Australia: +61 370 037070
France: +33 6 80 75 26 42
Middle East: +966 5300 19292
UK: +44 20 4571 5454

Tech Support

Toll Free: 1800 208 3399
customersupport@peoplelinkvc.com