



V 1.1.1 - 102024

PeopleLink Amplifier 200W


[Watch Video !\[\]\(e3f8612927870f2e0f9f5989e6dd3064_img.jpg\)](#)

key Features

- 200 Watts Class D Mixer Amplifier with Bass, treble Equalizer
- 2 Balance Phantom Microphone Inputs with XLR
- 1 Unbalanced Microphone Phono Input
- RS232 connection for control

PeopleLink 200-Watts 3 Channel Mixer Amplifier Class-D

PeopleLink Amplifier is the ultimate choice for High Definition Audio signal processor. The most powerful HD audio available, it delivers full continuous presence meetings with Multi Location Voice conferencing and is ideal for local sound reinforcement. Highly scalable and flexible - PeopleLink's Amplifier provides HD voice communications platform. This powerful, fault tolerant solution is ideal for the communication needs of large enterprises as well as Service providers .

Advanced design - This is the most powerful and up to date Amplifier available in the Industry today. It is Compact, Simple and extremely User-friendly allowing you to do Large scale Video/Audio Conferencing from a compact audio System.



General Specifications

Amplifier Parameters

Channel Type : 2 Channel Stereo Amplifier Equalizer (tone controller) : Yes

Power Output RMS : 200 Watts

Power Output @ 8 Ohms : 2 x 100Watts VCC = 24V DC

Minimum Impedance : 8 Ohms @50 Watts

Frequency Response : 20Hz, 20kHz

Operating Supply Voltage : 12 volts to 24 volts

Type : Class-D (Digital)

Frequency Range : 30 Hz to 16Khz

Operating Supply : 8V to 24 volts

Packaging Information

Components : 19 inch chassis 1U (Rack Mountable)

Package Includes: Inbuilt Package Includes People Link Amplifier, 2 RCA Cable, Phoenix Connectors, Power Cable.

Interface

Line Input : 1 x 2RCA

Line output : 1 x 2RCA

Unbalanced Mic input : 1 x 6.5mm phono jack with gain controller

Balanced 48Volts /12Volts Phantom Mic Inputs : 2 x XLR ports with separate gain controllers

Controlling : Rs232 Visca

Physical Dimensions and Chassis Details

Made with MS and Aluminum metal with black matt fine structure powder coating and 2 U Size with

Rack mountable

Dimensions : 435mm x 8.9mm x 175mm (L x W x D)

Accessories



Audio Cable




Power Cable




Phoenix connectors

Device Set-up

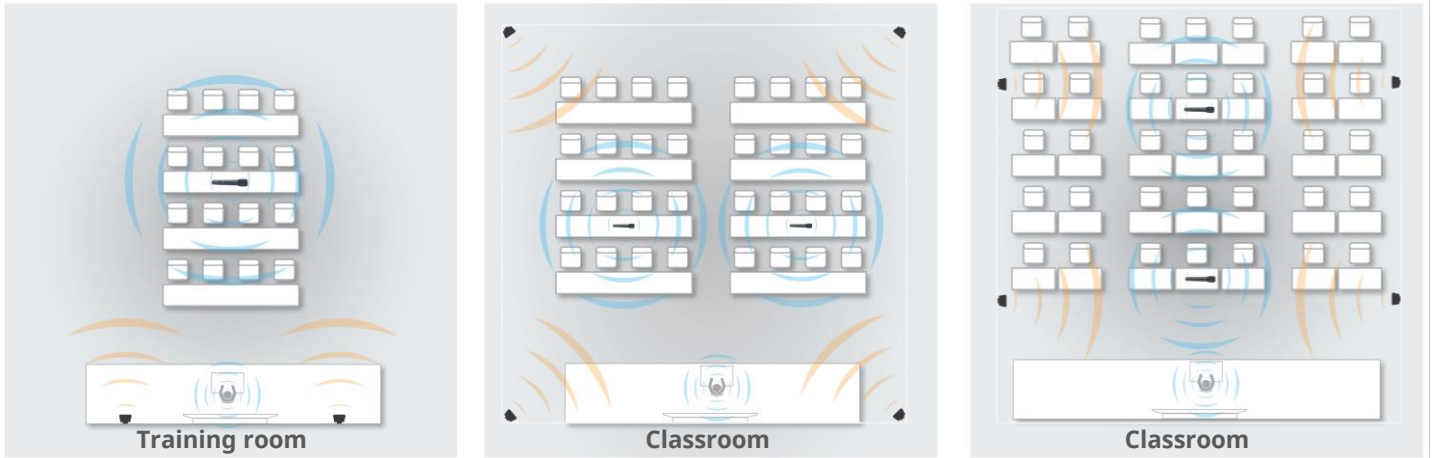

Disclaimer:- Room setup diagrams provided for reference only. Actual room setup and size may vary as per requirements.

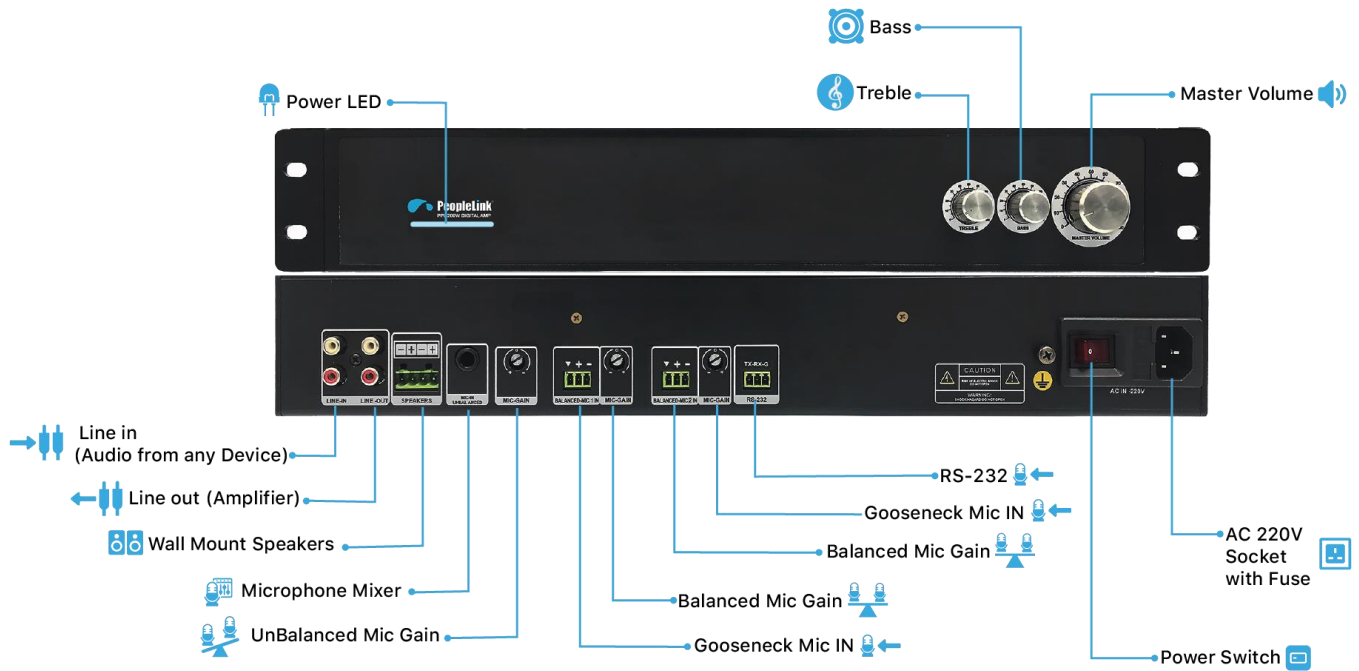

Ordering Information

PeopleLink Amplifier 200W

: **PPU-MCC-AMP-200W**

LEARN MORE

For more information on **Amplifier 200W** [Click Here](#)

SALES AND INQUIRIES

Global Headquarters

Q3-A3, 10th Floor Cyber Towers,
HITEC City, Hyderabad,
Telangana 500081, **India**
Phone: +91 9100123013
Email: vc@peoplelinkvc.com

International Contact Numbers

USA: +1 669-696-8383
Australia: +61 370 037070
France: +33 6 80 75 26 42
Middle East: +966 5300 19292
UK: +44 20 4571 5454

UAE: +971 4 3339082
Canada: +1 647-945-7373
Malaysia: +(6)018-2872188
New Zealand: +64-9-802-4666
Africa: +254 107 529 656

Tech Support

Toll Free: 1800 208 3399
customersupport@peoplelinkvc.com