



V.1.1 - 10/2024

## PeopleLink Cascade 4C+



Watch Video 

PeopleLink Cascade 4C+ Cascade is a conference audio controller. The 4C can be connected with an active speaker interface and 4 omnidirectional microphones based on a 2.4G wireless cascade. It also supports local amplification of wireless handheld microphones widely used in large conferences. It can also be used generally in Conference rooms and entertainment venues.

### Intelligent Audio Processing:

Adopting the latest audio voice processing technology, including digital audio processing, dynamic noise reduction processing, industry-leading 384ms echo cancellation, full-duplex voice calls, 360° omni-directional pickup, etc. The effective pickup radius of a single omnidirectional microphone can reach 2 Meter. Two-way, natural, and smooth meetings can be conducted at the same time, giving users a high-quality.

## Key Features

- Support external active speakers
- Supports conference communication software such inMeet, skype, zoom etc.
- Removable wireless omni directional microphone



## General Specifications

---

### Interface

- B type USB interface
- 6.5 mm audio jack
- Antenna interface
- DC power interface

### Wireless Omnidirectional Microphone

- Audio bandwidth is 100-16KHz
- **Sensitivity:** -38 dB 94dB
- **SPL@1KHz Signal to noise ratio:** 65dB
- 94dB SPL@1KHz, A-weight

### Audio Characteristics

- Digital Audio Processing
- 384 ms Echo Cancellation technology
- Intelligent Dynamic Noise Reduction
- Full Duplex 360° pickup range
- Effective pickup range - 3 to 4 meters

### Computer System Required

Windows 7 / Windows 10 / MacOS

### Power Supply

- Host power adapter -12V2A
- Slave power adapter -5V/500mA

### Button on mics

- Microphone mute button
- Speaker mute button
- Volume up/down button
- Slave switch button

### Master LED light Status

**Master red light is always on:** Under normal work

**The speaker status indicator on master is green:**  
Under normal work

**The speaker status indicator light on master is on red:** Speaker mute

### Slave Mics LED Light Status

**Normal work:** The green light is always on

**Mute microphone:** Red light is always on

**Low power:** The red light of the speaker flashes

**Volume adjustment:** The mic green indicator flashes

**Not connected normally:** The green light flashes

### Environmental Requirements

**Temperature:** 5°~44°

**Humidity:** 20~85% (no condensation)

**Noise Level:** <48db

**Storage Temperature:** -10°~55°

### Product Parameter

#### Size:

I. Master – 267 x 145 x 51mm

II. Single mic – 110 x 110 x 25mm




#### Weight:

I. Master - 1044g

II. Singel mic : 236g


**Color:** Business black

## Application Scenarios

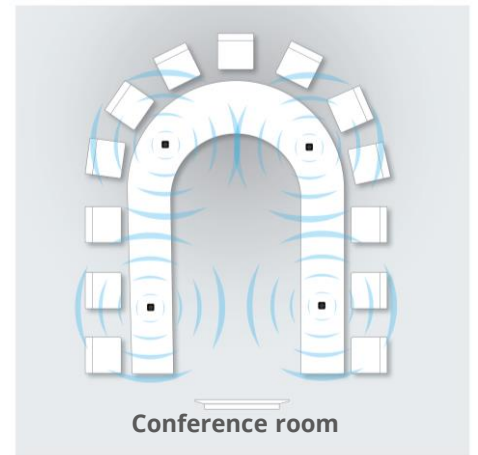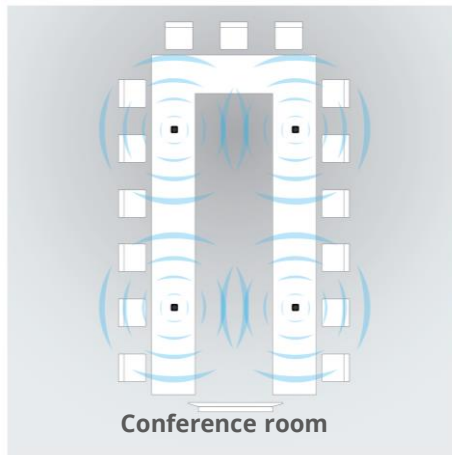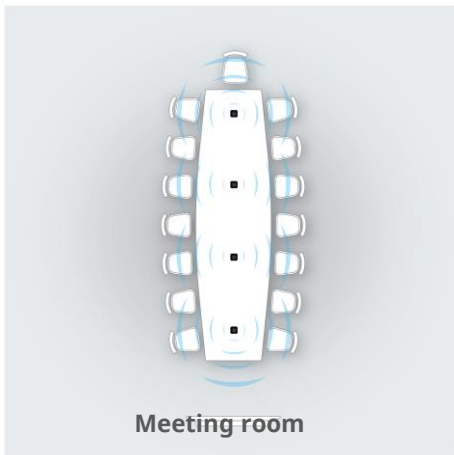

**Disclaimer:-** Room setup diagrams provided for reference only. Actual room setup and size may vary as per requirements.

## Connectivity

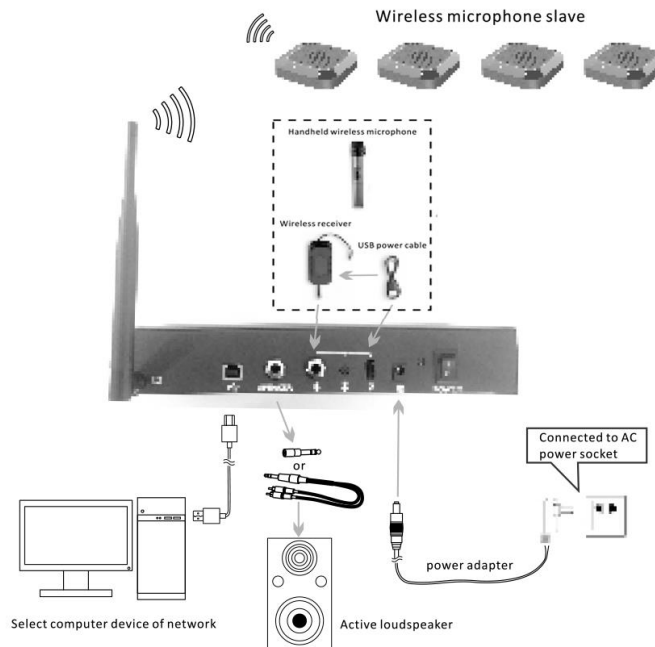

## Ordering Information

**PeopleLink Cascade 4C+**

**: PPU-PVC-AD-50WS-4C+**

**LEARN MORE**

For more information on **Cascade 4C+** [Click Here](#)

## SALES AND INQUIRIES

### Global Headquarters

Q3-A3, 10th Floor Cyber Towers,  
HITEC City, Hyderabad,  
Telangana 500081, **India**  
**Phone:** +91 9100123013  
**Email:** [vc@peoplelinkvc.com](mailto:vc@peoplelinkvc.com)

### International Contact Numbers

**USA:** +1 669-696-8383  
**Australia:** +61 370 037070  
**France:** +33 6 80 75 26 42  
**Middle East:** +966 5300 19292  
**UK:** +44 20 4571 5454

**UAE:** +971 4 3339082  
**Canada:** +1 647-945-7373  
**Malaysia:** +(6)018-2872188  
**New Zealand:** +64-9-802-4666  
**Africa:** +254 107 529 656

### Tech Support

**Toll Free:** 1800 208 3399  
[customersupport@peoplelinkvc.com](mailto:customersupport@peoplelinkvc.com)