



V.1.0 - 102024

## PeopleLink Interactive Podium



The **PeopleLink Interactive Podium** is designed to operate efficiently across a variety of environmental conditions. It supports a storage humidity range of 10% to 90% non-condensing and a working humidity range of 20% to 85% non-condensing, ensuring optimal performance in diverse settings. With a storage temperature tolerance from -10°C to +60°C and a working temperature range of 0°C to +40°C, this lectern is versatile for different climates. It can function effectively at altitudes up to 5000 meters and offers an impressive usage time of 18 hours per day over a week, making it suitable for extended use in various environments.


4o mini

## Key Features

- **High-Performance Processing:**  
Equipped with an 8-core processing chip and the latest Android 12.0 system for smooth operation and quick software response.
- **Large 27" 4K Display:**  
Features a high-definition 27" screen with 3840x2160 resolution for clear visuals, enhancing the viewing experience.
- **Multi-Touch Support:**  
Supports up to 20-point capacitive touch for accurate and responsive interaction, ideal for engaging presentations.
- **Versatile Connectivity:**  
Offers multiple connectivity options including HDMI, USB, and TYPE-C for seamless integration with other devices.
- **Electric Lifting System:**  
Includes an electric lifting mechanism to accommodate different speaker heights and preferences, ensuring ergonomic usage..

## General Specifications

| Item                                | Parameter  |
|-------------------------------------|--|
| LCD Size                            | : 27"  |
| Backlight Type (Backlight Type)     | : 3840x2160(pixels)  |
| Brightness                          | : 400 cd/m <sup>2</sup>  |
| Contrast Ratio                      | : 1000:1   |
| Response Time                       | : 14ms   |
| Pixel Pitch (mm)                    | : 0.1554mm(H)×0.1554mm(V)  |
| Viewing Angle                       | : 178°(H)/178°(V)  |
| Life Time                           | : 30,000 hrs (min.)  |
| Color Gamut (X% NTSC)               | : 72% (typ.)   |
| View Area (mm)                      | : 596.736mm×335.664mm  |
| Display Colors                      | : 1.07B colors   |
| System version (OS)                 | : Android12  |
| Internal cache capacity (RAM)       | : 8GB DDR4   |
| Internal storage capacity (ROM)     | : 64GB (Standard 64GB)   |
| Voltage (Power Requirements)        | : DC 20V/5A  |
| Maximum power (Power Consumption)   | : 100W   |
| Standby power (Standby Consumption) | : 0.5W   |
| Wi-Fi Standard                      | : IEEE 802.11a/b/g/n/ac  |
| Frequency (Operating Frequency)     | : 2.4GHz/5GHz  |
| Bluetooth                           | : 2.1+EDR / 4.2 / 5.2  |
| HDMI IN                             | : Version: HDMI2.1×1 Up to 3840×2160@60Hz  |
| Type-C OUT                          | : Max Resolution: 3840x2160@60Hz Version DP1.2   |
| USB-A                               | : ×2 Support images, music, video file playback.<br>Upgrade are not supported Interface: USB3.0 Type-A |
| HDMI OUT                            | : All signal can be looped-out ×1 Max<br>Resolution: 3840x2160@60Hz Version<br>HDMI2.1 (TMDS)          |

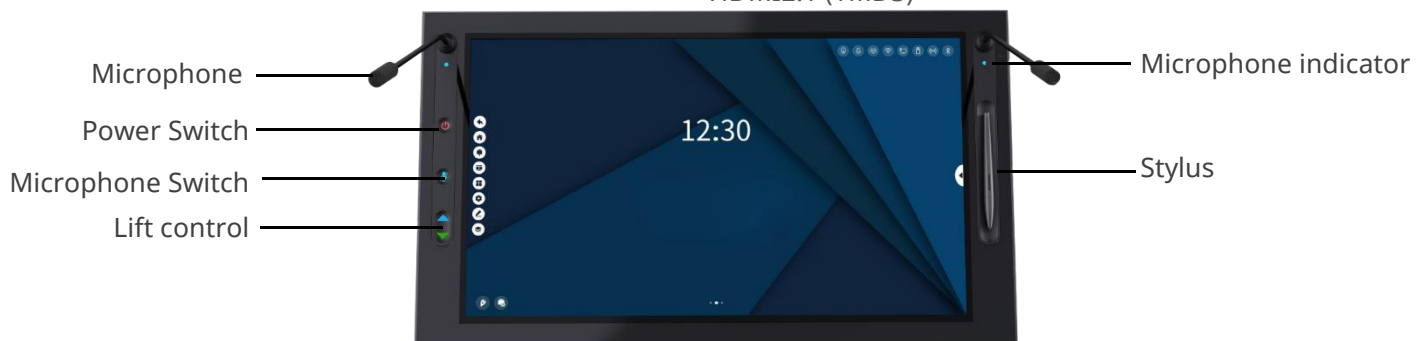

- Microphone switch, the default is to open
- Lift control switch, starts when pressed, stops when released
- Stylus, No need to match , write directly

## General Specifications

---

|   |  |
|---|--|
| <b>RJ45</b>                             | : 10M/100M/1000M Base-T self-adaptive ×1 |
| <b>Ethernet Interface</b>               | : RJ45                                   |
| <b>TYPE-C IN (power interface)</b>      | : ×1 Power supply (Adapter) DC 20V/5A    |
| <b>Bare machine dimensions (W×D×H)</b>  | : 775.6mm * 526mm * 1118mm               |
| <b>Base Elevation</b>                   | : Support                                |
| <b>Base Lifting/Rotation Adjustment</b> | : Support                                |
| <b>Accessories</b>                      |  |
| <b>Stylus</b>                           | : 1                                      |
| <b>Adapter</b>                          | : 1                                      |
| <b>Gooseneck microphone</b>             | : 2                                      |
| <b>5m HDMI Cable</b>                    | : 1                                      |
| <b>1.8m Type-C Cable</b>                | : 1                                      |
| <b>screen sharing dongle</b>            | : 1 (Optional)                           |
| <b>Qualified Certificate Label</b>      | : 1                                      |
| <b>Instructions</b>                     | : 1                                      |
| <b>Warranty Card</b>                    | : 1                                      |
| <b>Environment</b>                      |  |
| <b>Storage humidity</b>                 | : 10% ~ 90% non-condensing               |
| <b>Working humidity</b>                 | : 20% ~ 85% non-condensing               |
| <b>Storage temperature</b>              | : -10 ~ +60                              |
| <b>Working temperature</b>              | : 0 ~ +40                                |
| <b>Usage time</b>                       | : 16 hours x 7 days                      |

## Ordering Information

---

PeopleLink Interactive Podium :

### SALES AND INQUIRIES

---

#### Global Headquarters

Q3-A3, 10th Floor Cyber Towers,  
HITEC City, Hyderabad,  
Telangana 500081, **India**  
**Phone:** +91 9100123013  
**Email:** [vc@peoplelinkvc.com](mailto:vc@peoplelinkvc.com)

#### International Contact Numbers

**USA:** +1 669-696-8383  
**Australia:** +61 370 037070  
**France:** +33 6 80 75 26 42  
**Middle East:** +966 5300 19292  
**UK:** +44 20 4571 5454

#### Tech Support

**Toll Free:** 1800 208 3399  
[customersupport@peoplelinkvc.com](mailto:customersupport@peoplelinkvc.com)